



TEREX DEMAG CC 2800-1

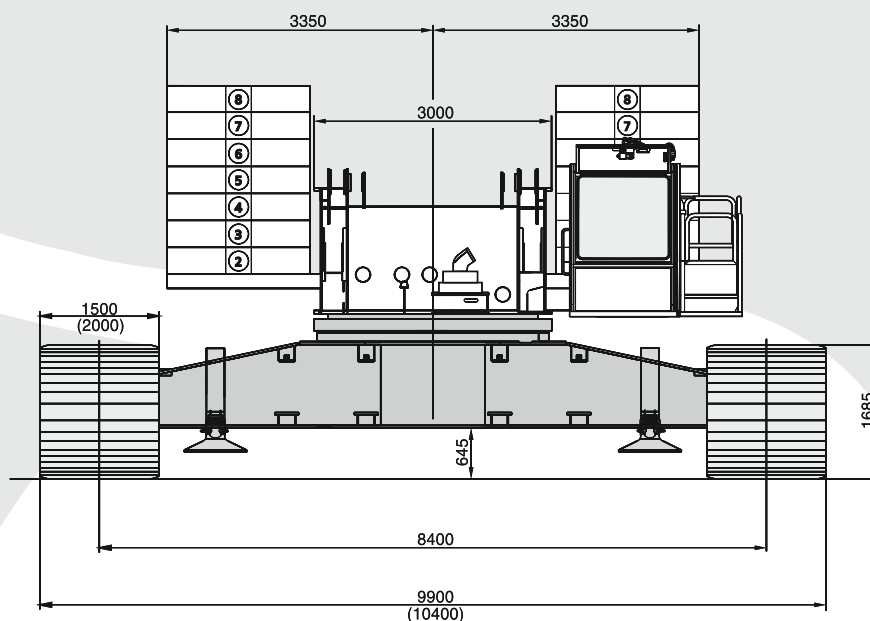

MAXIMUM CAPACITY: 600 TONS

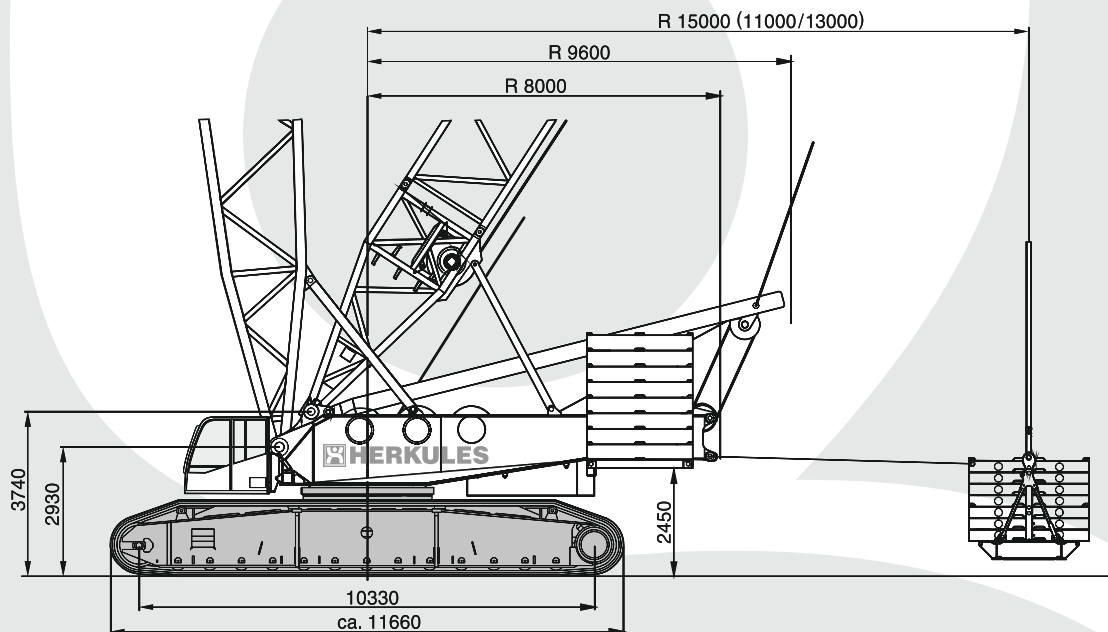

TECHNICAL DATA:

MAXIMUM CAPACITY: 600 TONS
MAXIMUM COUNTERWEIGHT: 180+60 TONS
SL - BALAST: 300 TONS

BOOM LENGTH:

- MAIN BOOM: 36 m - 84 m
- FIXED FLY JIB: 48 m - 150 m
- LUFFING FLY JIB: 24 m - 84 m

TEREX DEMAG CC 2800-1

MAXIMUM CAPACITY: 600 TONS

 **HERKULES**



36 m - 54,0 m

SSL



360°



8,4 m



180+60 t

Lifting capacities TEREX DEMAG CC 2800-1 - Main boom SSL version + SUPERLIFT

	36 m				42 m				48 m				54 m				
	SSL		HSSL		SSL		HSSL		SSL		HSSL		SSL		HSSL		
	0 t	0 t-300 t			0 t	0 t-300 t			0 t	0 t-300 t			0 t	0 t-300 t			
	11-15m		17m	11-15m	11-15m		17m	11-15m	11-15m		17m	11-15m	11-15m		17m	11-15m	
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	
m	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	m
7	578,0	600,0	600,0	-	-	-	-	-	-	-	-	-	-	-	-	-	7
8	505,0	600,0	600,0	-	504,0	593,0	593,0	-	504,0	580,0	580,0	-	-	-	-	-	8
9	427,0	600,0	600,0	-	425,0	593,0	593,0	-	426,0	580,0	580,0	-	427,0	525,0	525,0	525,0	9
10	358,0	599,0	599,0	-	356,0	593,0	593,0	-	355,0	580,0	580,0	-	354,0	525,0	525,0	525,0	10
12	261,0	583,0	583,0	-	259,0	574,0	574,0	-	258,0	580,0	580,0	-	257,0	525,0	525,0	525,0	12
14	204,0	519,0	549,0	-	202,0	516,0	534,0	-	201,0	514,0	532,0	-	200,0	512,0	525,0	511,0	14
16	166,0	454,0	482,0	-	165,0	451,0	479,0	-	163,0	449,0	477,0	-	162,0	448,0	475,0	446,0	16
18	140,0	403,0	428,0	-	138,0	401,0	426,0	-	136,0	399,0	423,0	-	135,0	397,0	422,0	396,0	18
20	120,0	363,0	371,0	-	118,0	360,0	382,0	-	116,0	358,0	380,0	-	115,0	356,0	378,0	355,0	20
22	104,0	323,0	323,0	-	102,0	326,0	345,0	-	101,0	324,0	345,0	-	100,0	322,0	343,0	321,0	22
24	92,5	284,0	284,0	-	90,5	294,0	305,0	-	89,0	293,0	315,0	-	87,5	293,0	313,0	292,0	24
26	82,5	251,0	251,0	-	80,5	269,0	273,0	-	79,0	267,0	284,0	-	77,5	266,0	286,0	265,0	26
28	74,5	228,0	222,0	-	72,5	245,0	245,0	-	70,5	244,0	256,0	-	69,5	244,0	262,0	243,0	28
30	67,5	203,0	196,0	-	65,5	220,0	220,0	-	63,5	226,0	234,0	-	62,5	224,0	239,0	224,0	30
34	-	-	-	-	54,5	180,0	178,0	-	52,5	193,0	194,0	-	51,0	192,0	202,0	193,3	34
38	-	-	-	-	46,8	149,0	143,0	-	44,6	161,0	161,0	-	43,0	167,0	171,0	166,3	38
42	-	-	-	-	-	-	-	-	38,4	137,0	133,0	-	36,5	146,0	146,0	143,0	42
46	-	-	-	-	-	-	-	-	-	-	-	-	31,3	123,0	123,0	121,6	46
49	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	110,0	49



60 m - 78,0 m

SSL



360°



8,4 m



180+60 t

Lifting capacities TEREX DEMAG CC 2800-1 - Main boom SSL version + SUPERLIFT


	60 m				66 m				72 m				78 m				
	SSL		HSSL		SSL		HSSL		SSL		HSSL		SSL		HSSL		
	0 t	0 t-300 t			0 t	0 t-300 t			0 t	0 t-300 t			0 t	0 t-300 t			
	11-15m	17m	11-15m		11-15m	17m	11-15m		11-15m	17m	11-15m		11-15m	17m	11-15m		
m	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	m
9	426,0	476,0	476,0	476,0	-	-	-	-	-	-	-	-	-	-	-	-	9
10	354,0	476,0	476,0	476,0	353,0	414,0	414,0	421,0	350,0	373,0	373,0	393,0	-	-	-	-	10
11	305,5	476,0	476,0	476,0	304,5	414,0	414,0	421,0	302,5	373,0	373,0	393,0	-	-	-	-	11
12	257,0	476,0	476,0	476,0	256,0	414,0	414,0	421,0	255,0	373,0	373,0	393,0	255,0	316,0	316,0	364,0	12
14	199,0	476,0	476,0	476,0	198,0	414,0	414,0	421,0	198,0	373,0	373,0	393,0	197,0	316,0	316,0	364,0	14
16	161,0	446,0	470,0	444,0	160,0	409,0	409,0	421,0	160,0	373,0	373,0	393,0	159,0	316,0	316,0	364,0	16
18	134,0	395,0	420,0	394,0	133,0	388,0	388,0	392,0	133,0	362,0	362,0	390,0	132,0	315,0	315,0	364,0	18
20	114,0	354,0	377,0	353,0	113,0	353,0	367,0	351,0	112,0	345,0	345,0	349,0	112,0	306,0	306,0	348,0	20
22	99,0	321,0	341,0	319,0	98,0	319,0	340,0	317,0	97,0	318,0	328,0	316,0	96,0	298,0	298,0	314,0	22
24	86,5	292,0	311,0	291,0	85,5	291,0	310,0	289,0	84,5	289,0	307,0	287,0	83,5	288,0	290,0	286,0	24
26	76,5	265,0	285,0	265,0	75,5	265,0	284,0	263,0	74,5	264,0	279,0	263,0	73,5	264,0	273,0	262,0	26
28	68,0	243,0	261,0	242,0	67,0	242,0	259,0	241,0	66,0	242,0	256,0	240,0	65,0	241,0	250,0	240,0	28
30	61,0	224,0	240,0	223,0	60,0	223,0	238,0	221,0	59,0	221,0	235,0	220,0	58,0	221,0	231,0	220,0	30
34	50,0	191,0	204,0	191,6	48,9	189,0	204,0	190,3	47,8	188,0	202,0	189,3	46,8	187,0	199,0	188,6	34
38	41,6	165,0	176,0	165,6	40,3	164,0	176,0	164,3	38,9	163,0	176,0	163,3	37,7	162,0	173,0	162,3	38
42	34,8	146,0	152,0	145,0	33,3	144,0	155,0	143,0	31,8	143,0	154,0	142,0	30,6	142,0	153,0	141,0	42
46	29,3	130,0	131,0	128,3	27,7	129,0	135,0	128,3	26,2	127,0	137,0	126,6	24,8	126,0	136,0	125,6	46
50	25,0	113,0	113,0	111,3	23,2	115,0	118,0	114,3	21,6	114,0	121,0	113,3	20,2	113,0	121,0	112,3	50
54	21,6	97,5	96,5	97,0	19,6	103,0	103,0	101,0	17,8	103,0	107,0	102,0	16,3	102,0	108,0	101,0	54
58	-	-	-	-	16,7	89,5	89,5	87,0	14,7	94,0	94,5	91,0	13,2	93,0	96,5	92,0	58
59	-	-	-	-	-	-	-	84,5	14,0	91,1	91,5	88,2	12,5	91,0	93,7	89,7	59
62	-	-	-	-	-	-	-	-	12,2	82,5	82,5	79,7	10,5	85,0	85,5	82,6	62
65	-	-	-	-	-	-	-	-	-	-	-	72,5	8,8	77,8	78,0	75,4	65
66	-	-	-	-	-	-	-	-	-	-	-	-	8,3	75,5	75,5	73,0	66
70	-	-	-	-	-	-	-	-	-	-	-	-	6,6	66,0	66,0	64,5	70

TEREX DEMAG CC 2800-1

MAXIMUM CAPACITY: 600 TONS



Working range: main boom SSL version + fixed fly jib SSL/LSL + SUPERLIFT

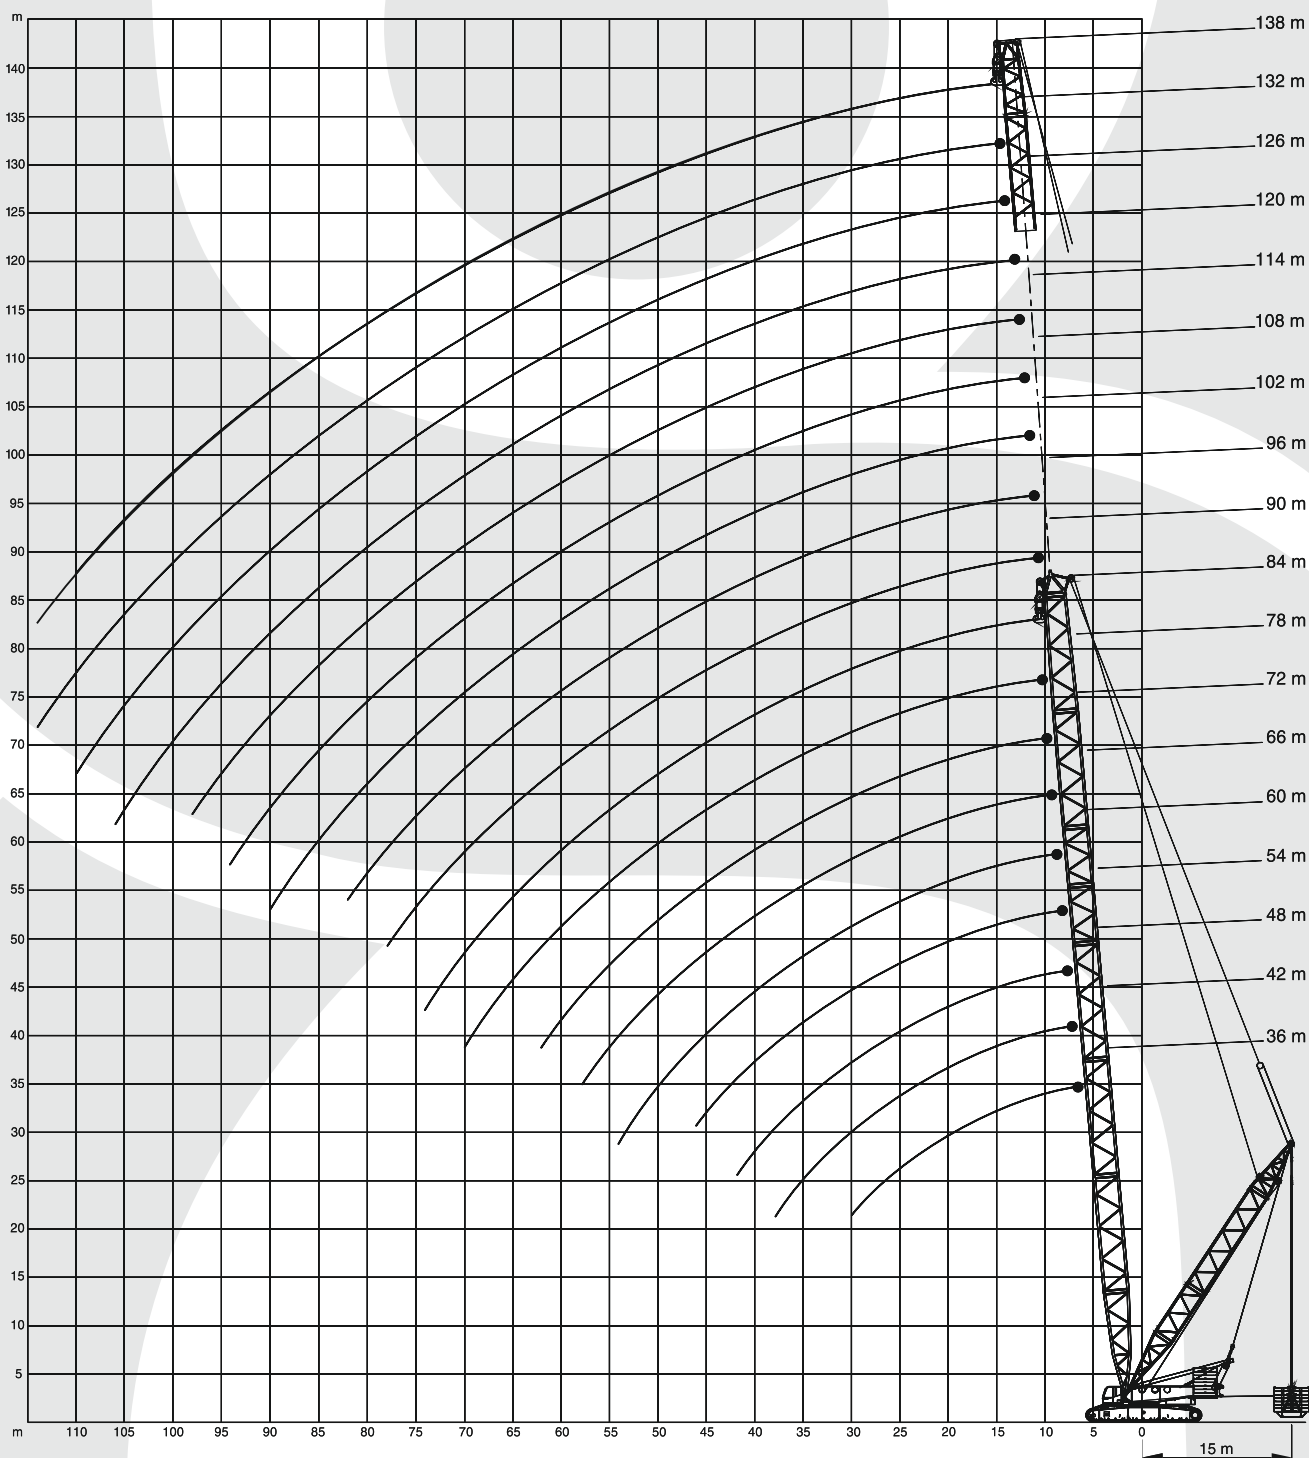

TEREX DEMAG CC 2800-1

MAXIMUM CAPACITY: 600 TONS

 **HERKULES**



90 m - 120,0 m

SSL
LSL



360°



8,4 m



180+60 t

Lifting capacities TEREX DEMAG CC 2800-1 - SSL/LSL version + SUPERLIFT

 m	90 m			96 m			102 m			 m
	SSL/LSL		SSL/LSL SGLmax.	SSL/LSL		SSL/LSL SGLmax.	SSL/LSL		SSL/LSL SGLmax.	
	0 t	0 t-300 t		0 t	0 t-300 t		0 t	0 t-300 t		
	t	t	t	t	t	t	t	t	t	
12	239,0	248,0	250,0	207,0	215,0	225,0	-	-	-	12
13	220,5	248,0	250,0	204,5	214,5	224,0	-	-	204,0	13
14	202,0	248,0	250,0	202,0	214,0	223,0	173,0	181,0	203,0	14
16	163,0	248,0	250,0	163,0	213,0	220,0	163,0	179,0	199,0	16
18	136,0	248,0	250,0	136,0	212,0	217,0	136,0	178,0	196,0	18
20	116,0	246,0	249,0	116,0	211,0	215,0	115,0	176,0	193,0	20
22	100,0	241,0	241,0	100,0	209,0	210,0	99,5	174,0	190,0	22
24	88,0	235,0	236,0	87,5	205,0	205,0	87,0	172,0	185,0	24
26	77,5	230,0	230,0	77,0	202,0	200,0	77,0	170,0	180,0	26
28	69,0	224,0	224,0	68,5	199,0	195,0	68,0	168,0	175,0	28
30	62,0	212,0	205,0	61,5	194,0	188,0	61,0	166,0	170,0	30
34	50,5	191,0	176,3	50,0	178,0	170,0	49,6	156,0	157,3	34
38	41,7	166,0	152,3	41,2	163,0	151,3	40,8	145,0	144,3	38
42	34,5	146,0	133,0	33,9	145,0	132,0	33,4	134,0	131,0	42
46	28,7	129,0	118,3	28,0	129,0	117,3	27,5	124,0	116,3	46
50	23,8	116,0	105,6	23,2	115,0	104,8	22,6	114,0	103,6	50
54	19,8	105,0	95,0	19,1	104,0	94,5	18,5	104,0	93,0	54
58	16,4	95,5	86,6	15,7	95,0	86,1	15,1	94,5	84,5	58
62	13,5	87,5	79,0	12,7	87,0	78,5	12,1	86,5	77,1	62
66	11,0	80,5	72,5	10,2	80,0	71,5	9,6	79,0	70,5	66
70	8,8	74,0	66,8	8,0	73,5	66,1	7,4	73,0	64,8	70
74	6,9	68,5	61,8	6,1	68,0	61,1	5,4	67,5	59,6	74
78	5,3	61,0	57,5	4,4	63,0	56,5	-	62,5	55,0	78
80	-	-	55,0	-	59,7	54,5	-	60,2	53,0	80
82	-	-	-	-	56,5	52,5	-	58,0	50,8	82
85	-	-	-	-	-	49,9	-	53,8	47,5	85
86	-	-	-	-	-	-	-	52,5	46,5	86
90	-	-	-	-	-	-	-	47,2	42,5	90

 m	108 m			114 m			120 m			 m
	SSL/LSL		SSL/LSL SGLmax.	SSL/LSL		SSL/LSL SGLmax.	SSL/LSL		SSL/LSL SGLmax.	
	0 t	0 t-300 t		0 t	0 t-300 t		0 t	0 t-300 t		
	t	t	t	t	t	t	t	t	t	
13	-	-	183,0	-	-	-	-	-	-	13
14	147,0	153,0	183,0	129,0	134,0	162,0	119,0	122,0	146,0	14
16	143,0	150,0	181,0	126,0	132,0	161,0	117,0	121,0	146,0	16
18	135,0	147,0	180,0	124,0	131,0	160,0	115,0	120,0	145,0	18
20	114,0	145,0	179,0	114,0	129,0	159,0	112,0	118,0	144,0	20
22	99,0	142,0	179,0	98,5	127,0	158,0	98,5	117,0	143,0	22
24	86,0	139,0	177,0	86,0	126,0	157,0	86,0	115,0	142,0	24
26	76,0	136,0	174,0	75,5	124,0	155,0	75,5	114,0	141,0	26
28	67,5	133,0	170,0	67,0	122,0	154,0	67,0	112,0	140,0	28
30	60,0	130,0	166,0	60,0	120,0	152,0	59,5	111,0	138,0	30
34	48,7	124,0	153,3	48,4	117,0	146,0	48,3	107,0	135,3	34
38	39,7	119,0	142,3	39,3	113,0	138,0	39,1	104,0	129,0	38
42	32,4	114,0	129,0	32,0	108,0	128,0	31,7	100,0	121,0	42
46	26,4	108,0	114,3	26,0	104,0	113,3	25,8	97,0	110,3	46
50	21,5	103,0	101,8	21,1	99,0	100,6	20,8	93,0	99,3	50
54	17,4	98,0	91,5	17,0	95,0	90,0	16,7	90,0	89,0	54
58	14,0	93,0	82,7	13,5	91,0	81,6	13,2	86,0	80,3	58
62	11,0	85,5	75,1	10,5	85,0	74,0	10,3	82,0	72,6	62
66	8,4	78,5	68,5	7,9	78,0	67,0	7,7	77,5	66,0	66
70	6,2	72,0	62,8	5,7	71,5	61,6	5,4	71,5	60,0	70
74	4,2	66,5	57,7	-	66,0	56,4	-	66,0	55,1	74
78	-	61,5	53,0	-	61,0	52,0	-	61,0	50,5	78
82	-	57,5	49,2	-	57,0	48,0	-	56,5	46,3	82
86	-	53,0	45,7	-	53,0	44,2	-	52,5	42,4	86
90	-	48,0	42,3	-	48,8	40,6	-	49,1	38,9	90
94	-	43,1	39,1	-	44,3	37,5	-	45,0	35,7	94
96	-	-	37,6	-	42,1	36,0	-	43,0	34,2	96
98	-	-	-	-	40,0	34,6	-	41,0	32,8	98
101	-	-	-	-	-	32,5	-	38,0	30,8	101
102	-	-	-	-	-	-	-	37,1	30,2	102
106	-	-	-	-	-	-	-	33,3	27,4	106

TEREX DEMAG CC 2800-1

MAXIMUM CAPACITY: 600 TONS

 **HERKULES**



84 m + 12 m



SH
LH+LF2

102 m + 12 m



360°



8,4 m



180+60 t

Lifting capacities TEREX DEMAG CC 2800-1 - SH/LH version + Fixed fly jib LF2

 m	84 m						90 m						 m
	SH/LH+ LF2	SH/LH+LF2 SGLmax.	SH/LH+ LF2	SH/LH+LF2 SGLmax.	SH/LH+ LF2	SH/LH+LF2 SGLmax.	SH/LH+ LF2	SH/LH+LF2 SGLmax.	SH/LH+ LF2	SH/LH+LF2 SGLmax.	SH/LH+ LF2	SH/LH+LF2 SGLmax.	
	10°		15°		20°		10°		15°		20°		
	t	t	t	t	t	t	t	t	t	t	t	t	
14	106,0	125,0	-	-	-	-	88,5	125,0	-	-	-	-	14
15	106,0	125,0	95,5	112,0	83,5	-	88,5	125,0	81,0	111,0	-	-	15
16	105,0	125,0	95,5	112,0	81,5	86,0	88,5	125,0	81,0	111,0	75,0	85,5	16
18	103,0	125,0	93,5	105,0	78,0	84,5	86,5	119,0	80,0	100,0	74,5	85,5	18
20	94,0	111,0	92,0	94,0	74,5	81,0	84,0	107,0	78,0	90,0	72,5	82,0	20
22	85,0	96,0	86,0	84,5	71,5	77,5	81,5	95,0	76,0	81,0	71,0	79,0	22
24	77,0	84,0	78,0	76,5	68,5	74,5	74,5	82,5	74,5	73,0	69,5	74,0	24
26	70,0	74,0	71,0	69,5	65,5	70,0	67,5	73,0	68,5	66,0	67,0	67,0	26
28	64,0	66,0	65,0	63,0	63,5	64,0	62,0	64,5	62,5	60,5	63,5	61,0	28
30	59,0	59,0	59,5	58,0	60,0	58,5	56,5	57,5	57,5	55,0	58,0	56,0	30
34	49,3	48,1	49,9	48,7	50,0	49,3	48,2	46,8	48,8	46,4	49,4	47,1	34
38	40,9	39,6	41,4	40,2	41,9	40,7	40,1	38,2	40,6	38,9	41,1	39,4	38
42	34,3	32,8	34,7	33,3	35,1	33,8	33,4	31,1	33,9	31,7	34,4	32,3	42
46	28,6	27,0	29,1	27,5	29,5	28,0	27,7	25,4	28,1	25,9	28,6	26,4	46
50	24,0	22,3	24,3	22,8	24,7	23,1	23,0	20,7	23,4	21,1	23,8	21,6	50
54	20,1	18,4	20,4	18,8	20,7	19,1	19,1	16,7	19,4	17,1	19,8	17,5	54
58	16,7	15,1	17,0	15,4	17,3	15,7	15,7	13,4	16,1	13,7	16,4	14,1	58
62	13,9	12,2	14,2	12,5	14,4	12,8	12,9	10,5	13,2	10,8	13,4	11,1	62
66	11,4	9,8	11,7	10,0	11,9	10,2	10,4	8,0	10,7	8,3	10,9	8,6	66
70	9,3	7,6	9,5	7,8	9,7	8,0	8,3	5,9	8,5	6,1	8,7	6,3	70
74	7,4	5,7	7,6	5,9	7,8	6,1	6,4	4,0	6,6	4,2	6,8	4,4	74
75	7,0	5,3	7,1	5,4	7,3	5,6	5,9	3,5	6,1	3,7	6,3	3,9	75
78	5,8	4,1	5,9	4,2	6,1	4,4	4,7	-	4,9	-	5,1	-	78
79	5,4	3,7	5,5	3,8	5,7	4,0	4,3	-	4,5	-	4,7	-	79
80	5,0	-	5,2	-	5,3	3,6	3,9	-	4,1	-	4,3	-	80
81	4,6	-	4,8	-	4,9	-	3,6	-	3,8	-	3,9	-	81
82	4,3	-	4,5	-	4,6	-	-	-	-	-	3,5	-	82
83	4,0	-	4,1	-	4,2	-	-	-	-	-	-	-	83
84	3,7	-	3,8	-	-	-	-	-	-	-	-	-	84


	96 m												102 m												
	SH/LH+ LF2		SH/LH+LF2 SGLmax.		SH/LH+ LF2		SH/LH+LF2 SGLmax.		SH/LH+ LF2		SH/LH+LF2 SGLmax.		SH/LH+ LF2		SH/LH+LF2 SGLmax.		SH/LH+ LF2		SH/LH+LF2 SGLmax.		SH/LH+ LF2		SH/LH+LF2 SGLmax.		
	10°				15°				20°				10°				15°				20°				
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	
m	84,5	110,0	-	-	-	-	70,5	103,0	-	-	-	-	70,5	103,0	65,0	98,0	-	-	70,5	103,0	65,0	98,0	60,5	83,5	15
16	84,5	110,0	77,5	103,0	-	-	70,5	103,0	65,0	98,0	60,5	83,5	70,5	103,0	65,0	98,0	60,5	83,5	70,5	103,0	65,0	98,0	60,5	83,5	16
17	83,0	109,0	77,5	100,0	71,5	83,0	70,5	103,0	65,0	95,5	60,5	83,5	70,5	103,0	65,0	95,5	60,5	83,5	70,5	103,0	65,0	95,5	60,5	83,5	17
18	82,0	108,0	77,0	97,0	71,5	83,0	69,5	103,0	65,0	93,0	60,5	83,5	69,5	103,0	65,0	93,0	60,5	83,5	69,5	103,0	65,0	93,0	60,5	83,5	18
20	80,0	104,0	75,0	87,0	70,5	81,5	67,5	99,5	63,5	83,0	60,0	82,0	67,5	99,5	63,5	83,0	60,0	82,0	67,5	99,5	63,5	83,0	60,0	82,0	20
22	78,0	93,5	73,5	78,0	69,0	78,5	65,5	90,0	62,0	74,5	58,5	75,5	65,5	90,0	62,0	74,5	58,5	75,5	65,5	90,0	62,0	74,5	58,5	75,5	22
24	71,5	82,0	72,0	70,5	67,5	71,5	64,0	80,5	60,5	67,0	57,0	68,5	62,5	71,0	59,0	61,0	55,5	62,0	62,5	71,0	59,0	61,0	55,5	62,0	24
26	65,0	72,0	66,0	64,0	66,0	64,5	62,5	71,0	57,5	62,5	54,5	56,0	62,5	71,0	57,5	62,5	54,5	56,0	62,5	71,0	57,5	62,5	54,5	56,0	26
28	59,5	64,0	60,5	58,0	61,0	59,0	57,5	62,5	55,5	55,0	54,5	56,0	57,5	62,5	55,5	55,0	54,5	56,0	57,5	62,5	55,5	55,0	54,5	56,0	28
30	54,5	57,0	55,5	53,0	56,0	53,5	52,5	55,5	53,5	50,0	53,5	51,0	52,5	55,5	53,5	50,0	53,5	51,0	52,5	55,5	53,5	50,0	53,5	51,0	30
34	46,3	45,9	46,9	44,5	47,5	45,2	44,5	44,6	45,2	42,0	45,8	42,7	44,5	44,6	45,2	42,0	45,8	42,7	44,5	44,6	45,2	42,0	45,8	42,7	34
38	39,3	37,2	39,8	37,5	40,3	38,1	37,8	35,7	38,4	35,1	38,9	35,7	37,8	35,7	38,4	35,1	38,9	35,7	37,8	35,7	38,4	35,1	38,9	35,7	38
42	32,4	30,1	32,9	30,7	33,4	31,3	31,5	28,5	32,1	29,2	32,6	29,8	31,5	28,5	32,1	29,2	32,6	29,8	31,5	28,5	32,1	29,2	32,6	29,8	42
46	26,7	24,4	27,1	24,9	27,6	25,4	25,8	22,7	26,3	23,3	26,8	23,9	25,8	22,7	26,3	23,3	26,8	23,9	25,8	22,7	26,3	23,3	26,8	23,9	46
50	22,0	19,6	22,4	20,1	22,8	20,6	21,1	18,0	21,5	18,5	21,9	19,0	21,1	18,0	21,5	18,5	21,9	19,0	21,1	18,0	21,5	18,5	21,9	19,0	50
54	18,0	15,7	18,4	16,1	18,8	16,5	17,1	14,0	17,5	14,5	17,9	14,9	17,1	14,0	17,5	14,5	17,9	14,9	17,1	14,0	17,5	14,5	17,9	14,9	54
58	14,7	12,3	15,0	12,7	15,3	13,0	13,8	10,6	14,1	11,1	14,5	11,4	13,8	10,6	14,1	11,1	14,5	11,4	13,8	10,6	14,1	11,1	14,5	11,4	58
62	11,8	9,4	12,1	9,8	12,4	10,1	10,9	7,7	11,2	8,1	11,5	8,5	10,9	7,7	11,2	8,1	11,5	8,5	10,9	7,7	11,2	8,1	11,5	8,5	62
66	9,3	6,9	9,6	7,2	9,9	7,5	8,4	5,2	8,7	5,6	9,0	5,9	8,4	5,2	8,7	5,6	9,0	5,9	8,4	5,2	8,7	5,6	9,0	5,9	66
67	8,7	6,4	9,0	6,6	9,3	6,9	-	4,6	-	5,0	8,4	5,3	8,7	6,4	-	4,6	-	5,0	8,4	5,3	8,7	6,4	-	4,6	67
69	7,7	5,3	7,9	5,5	8,2	5,8	-	3,6	-	3,9	-	4,1	7,7	5,3	-	3,6	-	3,9	-	4,1	7,7	5,3	-	3,6	69
70	7,2	4,8	7,4	5,0	7,7	5,3	-	-	-	-	-	3,6	7,2	4,8	-	-	-	-	-	-	7,2	4,8	-	-	70
72	6,2	3,8	6,4	4,0	6,7	4,3	-	-	-	-	-	-	6,2	3,8	-	-	-	-	-	-	6,2	3,8	-	-	72
73	5,7	-	6,0	3,6	6,2	3,8	-	-	-	-	-	-	5,7	-	-	-	-	-	-	-	5,7	-	-	-	73
74	5,3	-	5,5	-	5,7	-	-	-	-	-	-	-	5,3	-	-	-	-	-	-	-	5,3	-	-	-	74
78	3,6	-	3,8	-	4,0	-	-	-	-	-	-	-	3,6	-	-	-	-	-	-	-	3,6	-	-	-	78
79	-	-	-	-	3,6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	79

TEREX DEMAG CC 2800-1

MAXIMUM CAPACITY: 600 TONS



Working range: SH+LF2 & SH/LH + LF2

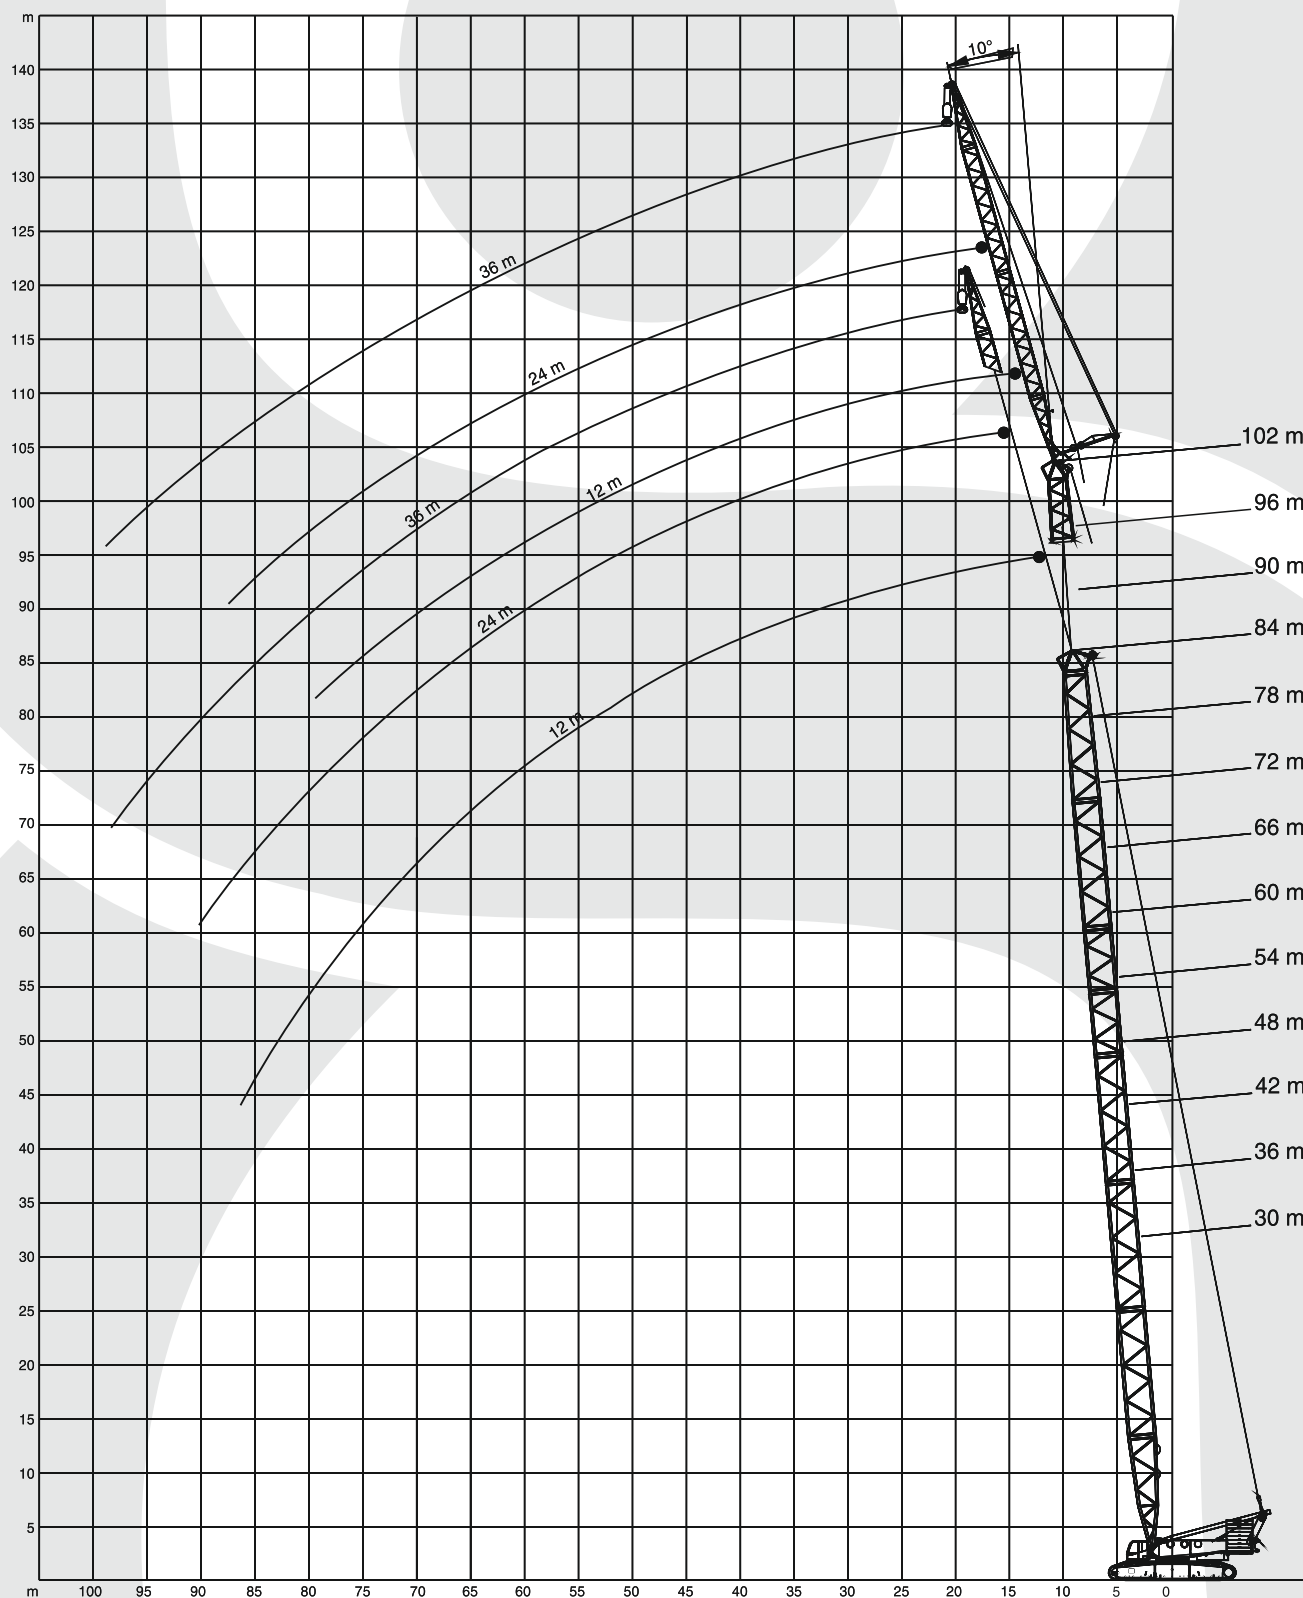

TEREX DEMAG CC 2800-1

MAXIMUM CAPACITY: 600 TONS



Other configurations CC2800-1

Typ 2724
24 - 84 m

SH

Typ 2724/2421
66 - 102 m (78 - 108 m)

SH/LH
SH/LH SGL max.

Typ 2724
36 - 84 m (54 - 108 m)

SSL (HSSL)

Typ 2724 / 2421
90 - 138 m

SSL/LSL
SSL/LSL SGL max.

Typ 2421
24 - 84 m

SW

Typ 2724
30 - 66 m


Typ 2421
24 - 96 m

Typ 2724
36 - 84 m (54 - 108 m)

SWSL (HSWSL)

TEREX DEMAG CC 2800-1

MAXIMUM CAPACITY: 600 TONS

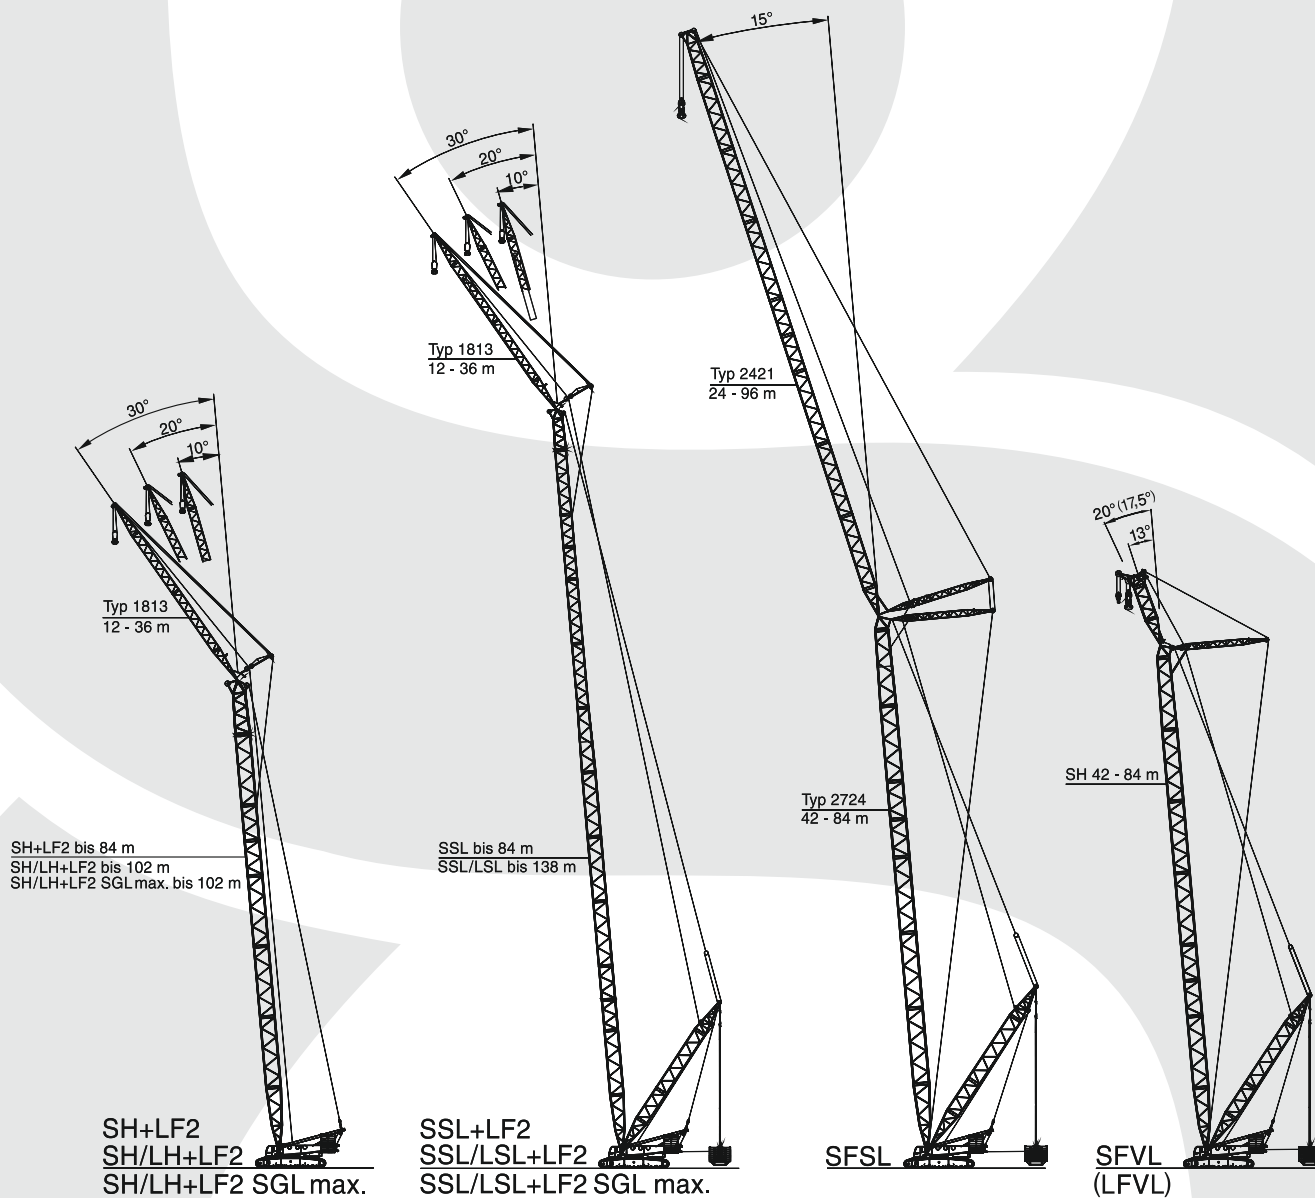

For more information about other configurations contact with the nearest branch