


TEREX CTL 140 -10

UDŹWIG MAKSYMALNY 10 TON

HERKULES

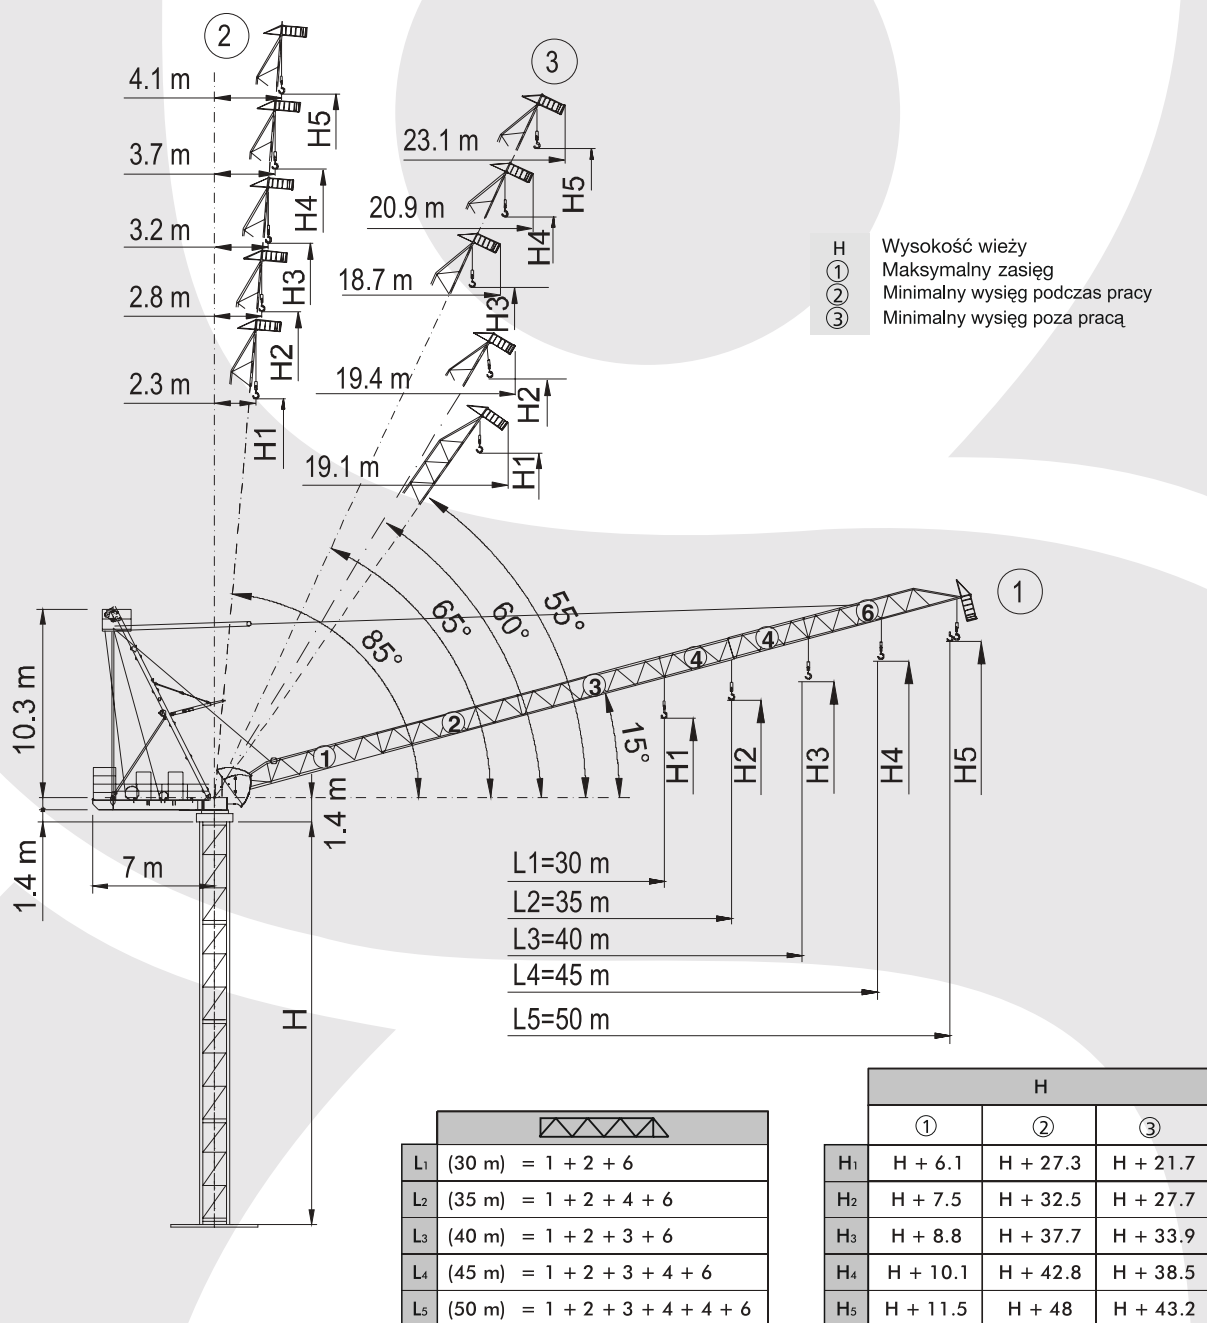

DANE TECHNICZNE:

UDŹWIG MAKSYMALNY: 10 TON

DŁUGOŚĆ WYSIĘGNIKA: 50 M

UDŹWIG NA MAKSYMALNYM WYSIĘGU: 1,80 TONY

TEREX CTL 140 -10

UDŹWIG MAKSYMALNY 10 TON




Tabela udźwigów

					m	15	20	25	30	35	40	45	50
5 t				- 28.4	m	5.00	5.00	5.00	4.61	3.60	2.85	2.27	1.80
5 t				- 29.2	m	5.00	5.00	5.00	4.81	3.78	3.00	2.4	*
7.5 t				- 22.1	m	7.50	7.50	6.36	4.92	3.88	3.10	2.50	
10 t				- 17.4	m	10.00	8.42	6.25	4.81	3.78	3.00	2.40	
5 t				- 30	m	5.00	5.00	5.00	5.00	3.97	3.2	*	
7.5 t				- 22.5	m	7.50	7.50	6.56	5.11	4.07	3.30		
10 t				- 17.7	m	10.00	8.62	6.45	5.01	3.97	3.20		
5 t				- 34.9	m	5.00	5.00	5.00	5.00	4.40			
7.5 t				- 23.1	m	7.50	7.50	6.78	5.33	4.30			
10 t				- 18.1	m	10.00	8.85	6.68	5.23	4.20			
5 t				- 30.0	m	5.00	5.00	5.00	5.00				
7.5 t				- 23.5	m	7.50	7.50	6.95	5.50				
10 t				- 18.3	m	10.00	9.02	6.84	5.40				

* = + 200 kg - 45 m - 40 m

Inne konfiguracje




Kotwienie wewnętrzne

TS 16c											
[m]											
	L ₁	L ₂	L ₃	L ₄	L ₅	L ₁₋₂	L ₃₋₄	L ₁	L ₂		
C _{min}	13					11		9			
H _{max}	44.3	41.3	38.4	35.4	32.5	35.4	29.5	35.4	29.5		
A _{min}	2										
x	2.3										
y	1.8										

TS 21c													
[m]													
	L ₁	L ₂	L ₃	L ₄	L ₅	L ₁₋₂	L ₃₋₄	L ₅	L ₁	L ₂₋₃	L ₄₋₅	L ₁	L ₂₋₃
C _{min}	15					13		11			9		
H _{max}	50.2	47.2	44.3	41.3	38.4	41.3	35.4	29.5	38.4	35.4	29.5	35.4	29.5
A _{min}	2												
x	2.8												
y	2.3												

min. 2.3 m (TS16)
min. 2.6 m (TS21)

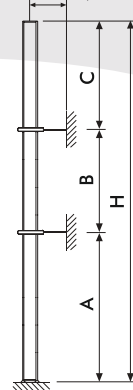

Kotwienie zewnętrzne

TS 16 R1				TS 21 R2		
[m]						
	L ₁₋₂	L ₃₋₄	L ₅	L ₁₋₂	L ₃₋₄	L ₅
A _{min/max}	24/30	24/27	24/25	24/36	24/33	24/30
B _{min/max}	17.7/23.6	17.7/23.6	17.7/23.6	17.7/23.6	17.7/23.6	17.7/23.6
C _{max}	30	27	25	36	33	30
H _{max}						



HERKULES

www.gzsa.pl



TEREX CTL 140 -10

UDŹWIG MAKSYMALNY 10 TON





Konfiguracja wieży

TS16

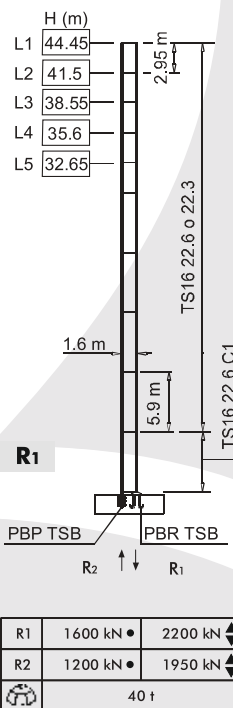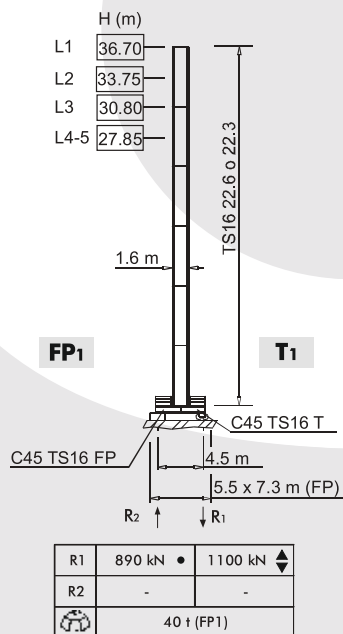

TS21

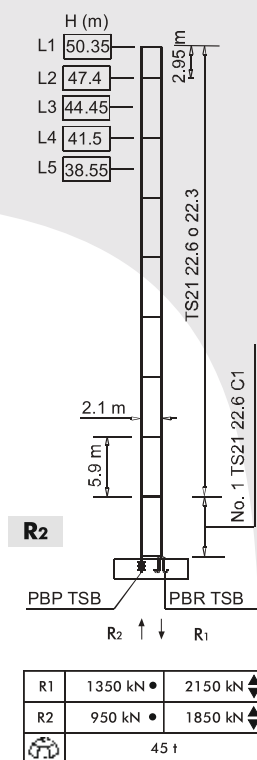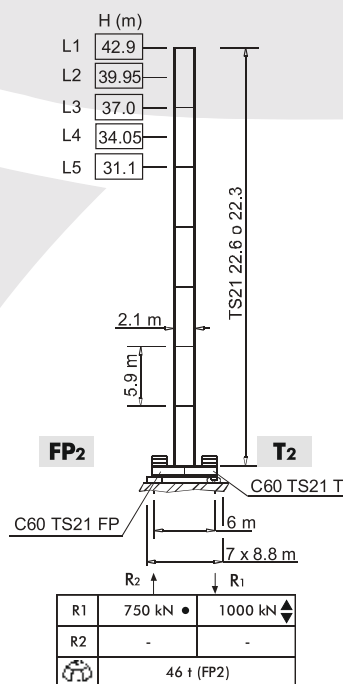

H Max wysokość p.h.
• podczas pracy
◄ poza pracą
masa żurawia bez balastu
max wysięgnik, max wysokość

TEREX CTL 140 -10

UDŹWIG MAKSYMALNY 10 TON



Mechanizmy

€	⚡	🎧
104 * kVA	400 V - 50 Hz / 460 V - 60 Hz	2000/14/CE

* Żuraw bez układu jezdznego

			m/min	t	kW	długość liny (m)
	43 AFC 50 R00 43 AFC 50 R01 (WARIANT)		0 → 3	5	43	580 m (R00) 850 m (R01)
			0 → 11	5		
			0 → 44	5		
			0 → 80	2.5		
			0 → 120	1.6		
			0 → 2	7.5		
			0 → 7.3	7.5		
			0 → 29.3	7.5		
			0 → 53.3	3.75		
			0 → 80	2.4		
			0 → 1.5	10		
			0 → 5.5	10		
			0 → 22	10		
			0 → 40	5		
			0 → 60	3.2		

	LFC 37 R00 (WARIANT)	1,5 min	37 kW
	SCC 2 2 100S	0 → 0.75 obr/min	2 × 5.81 kW
	TAD 2RG 4M3	0 → 24 m/min	4 × 3 kW

- Nakierowanie wysięgnika
- Podnoszenie
- Obrót
- Jazda
- Dyrektywa odnośnie poziomu akustycznego
- Całkowita moc zainstalowana
- Zasilanie