


WOLFF WK 4615 SL

UDŹWIG MAKSYMALNY 6 TON

 **HERKULES**

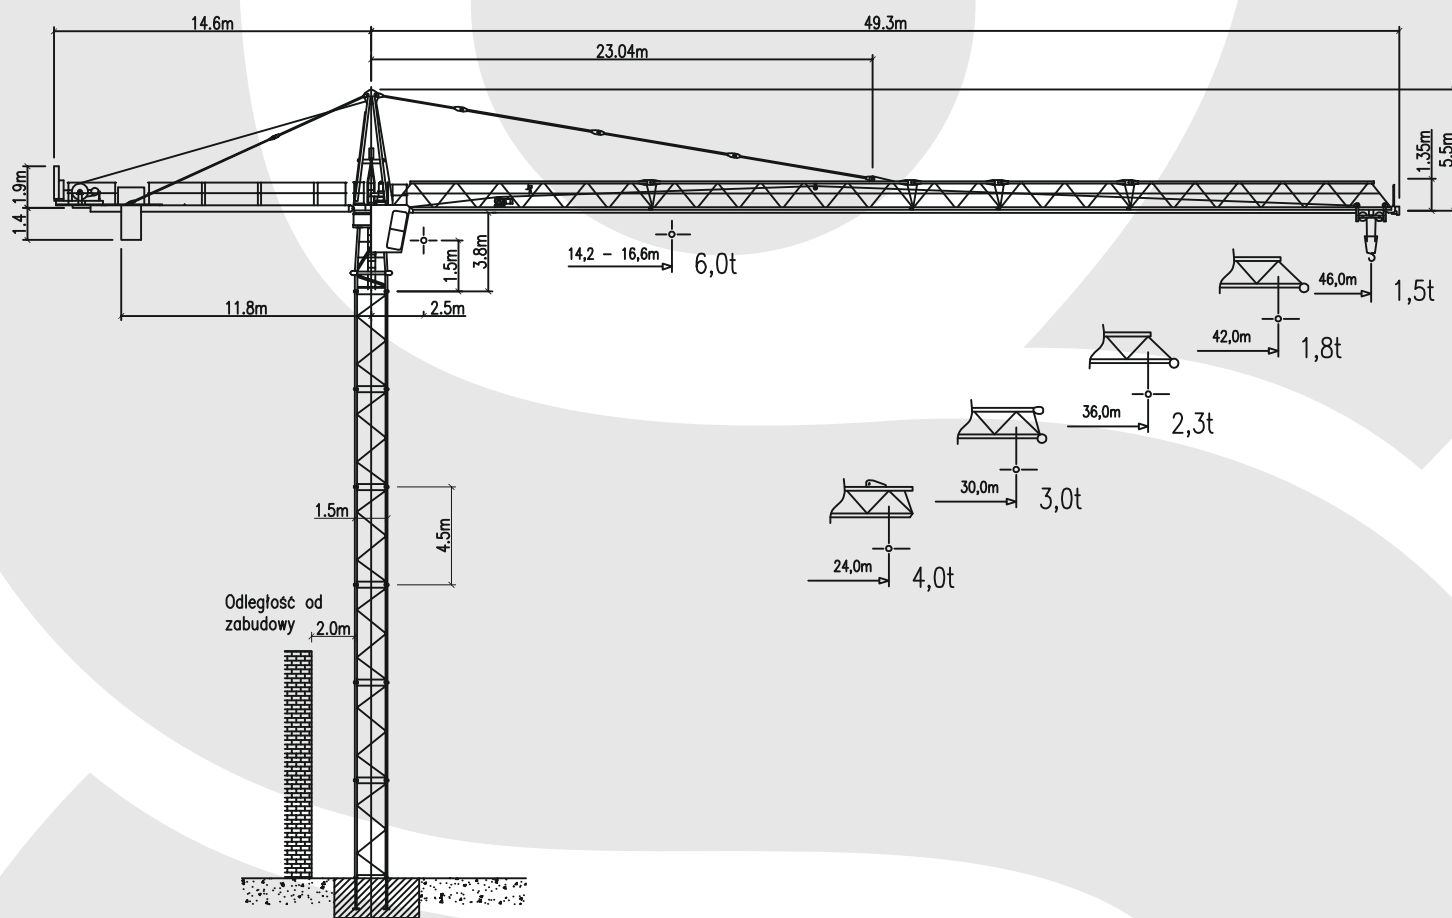

DANE TECHNICZNE:

UDŹWIG MAKSYMALNY: 6 TON
DŁUGOŚĆ WYSIĘGNIKA: 46 M

UDŹWIG NA MAKSYMALNYM WYSIĘGU: 1,5 TONY

WOLFF WK 4615 SL

UDŹWIG MAKSYMALNY 6 TON



Tablica udźwągów

		Wysięg (m)		20	24	30	36	42	46	
Dł. wysięgnika (m)	46	2,5 - 14,2	6,0	4,1	3,3	2,6	2,1	1,7	1,5	Udźwig (t)
	42	2,5 - 14,9		4,3	3,5	2,7	2,2	1,8		
	36	2,5 - 15,5		4,5	3,7	2,9	2,3			
	30	2,5 - 16,2		4,7	3,9	3,0				
	24	2,5 - 16,6		4,9	4,0					

		Wysięg (m)		20	24	30	36	42	46	
Dł. wysięgnika (m)	46	2,5 - 26,3	3,0	3,0	3,0	2,6	2,1	1,7	1,5	Udźwig (t)
	42	2,5 - 27,6		3,0	3,0	2,7	2,2	1,8		
	36	2,5 - 28,8		3,0	3,0	2,9	2,3			
	30	2,5 - 30,0		3,0	3,0	3,0				
	24	2,5 - 24,0		3,0	3,0					

WOLFF WK 4615 SL

UDŹWIG MAKSYMALNY 6 TON



Konfiguracja wieży


Dla żurawia wolnostojącego na kotwie fundamentowej.

Część obrotowa

Wysokość do haka **A = 1,5 m**

Wysokość do wysięgnika **B = 3,8 m**

Łączna wysokość **C = 9,3 m**

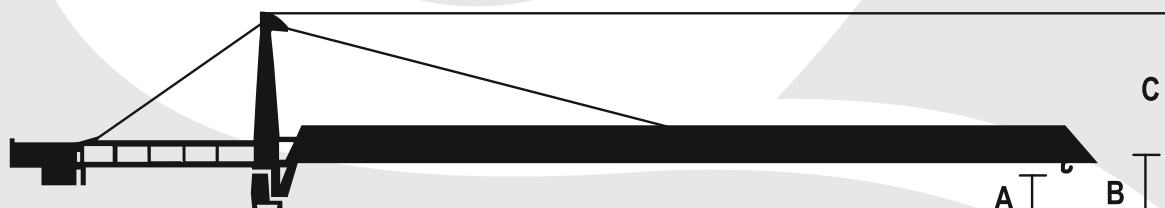

1	4,0		TSL 15.4	TSL 15.4	TSL 15.4
2	9,0		TSL 15.4	TSL 15.4	TSL 15.4
3	13,5		TSL 15.4	TSL 15.4	TSL 15.4
4	18,0		TSL 15.4	TSL 15.4	TSL 15.4
5	22,5		TSL 15.4	TSL 15.4	TFSA 15.4
6	27,0		TSL 15.4	TFSA 15.4	UVA 15.4
7	31,5	Typ B		UVA 15.4	UV 15.4
8	36,0			UV 15.4	UV 15.4
9	40,5			UV 15.4	UV 15.4
10	45,0			UV 15.4	UV 15.4
11	49,5			UV 15.4	UVÜ 15.4
12	54,0		Typ C		UV 20.4
13	58,5				UV 20.4
14	63,0		Typ C		
15	67,5				
16	72,0				
17	76,5				
18	81,0				
Elem. wieży	Wys. pod hakiem (m)				

WOLFF WK 4615 SL

UDŹWIG MAKSYMALNY 6 TON



Konfiguracja wieży

Dla żurawia wolnostojącego na ramie krzyżowej.

Część obrotowa

Wysokość do haka **A = 1,5 m**

Wysokość do wysięgnika **B = 3,8 m**

Łączna wysokość **C = 9,3 m**



1	4,5		TSL 15.4	TSL 15.4	TSL 15.4
2	9,0		TSL 15.4	TSL 15.4	TSL 15.4
3	13,5		TSL 15.4	TSL 15.4	TSL 15.4
4	18,0		TSL 15.4	TSL 15.4	TSL 15.4
5	22,5		TSL 15.4	TSL 15.4	TSL 15.4
6	27,0		TFSA 15.4	TFSA 15.4	TFSA 15.4
7	31,5			UVA 15.4	UVA 15.4
8	36,0	KRE 138		UV 15.4	UV 15.4
9	40,5	3,8 x 3,8 m			UV 15.4
10	45,0		KRE 250		UVÜ 15.4
11	49,5		5,0 x 5,0 m		
12	54,0			KRE 260.1	
13	58,5			6,0 x 6,0 m	
14	63,0				
15	67,5				
16	72,0				
17	76,5				
18	81,0				
Elem. wieży	Wys. pod hakiem (m)				