


WOLFF WK 7031 SL

UDŹWIG MAKSYMALNY 12 TON

 **HERKULES**

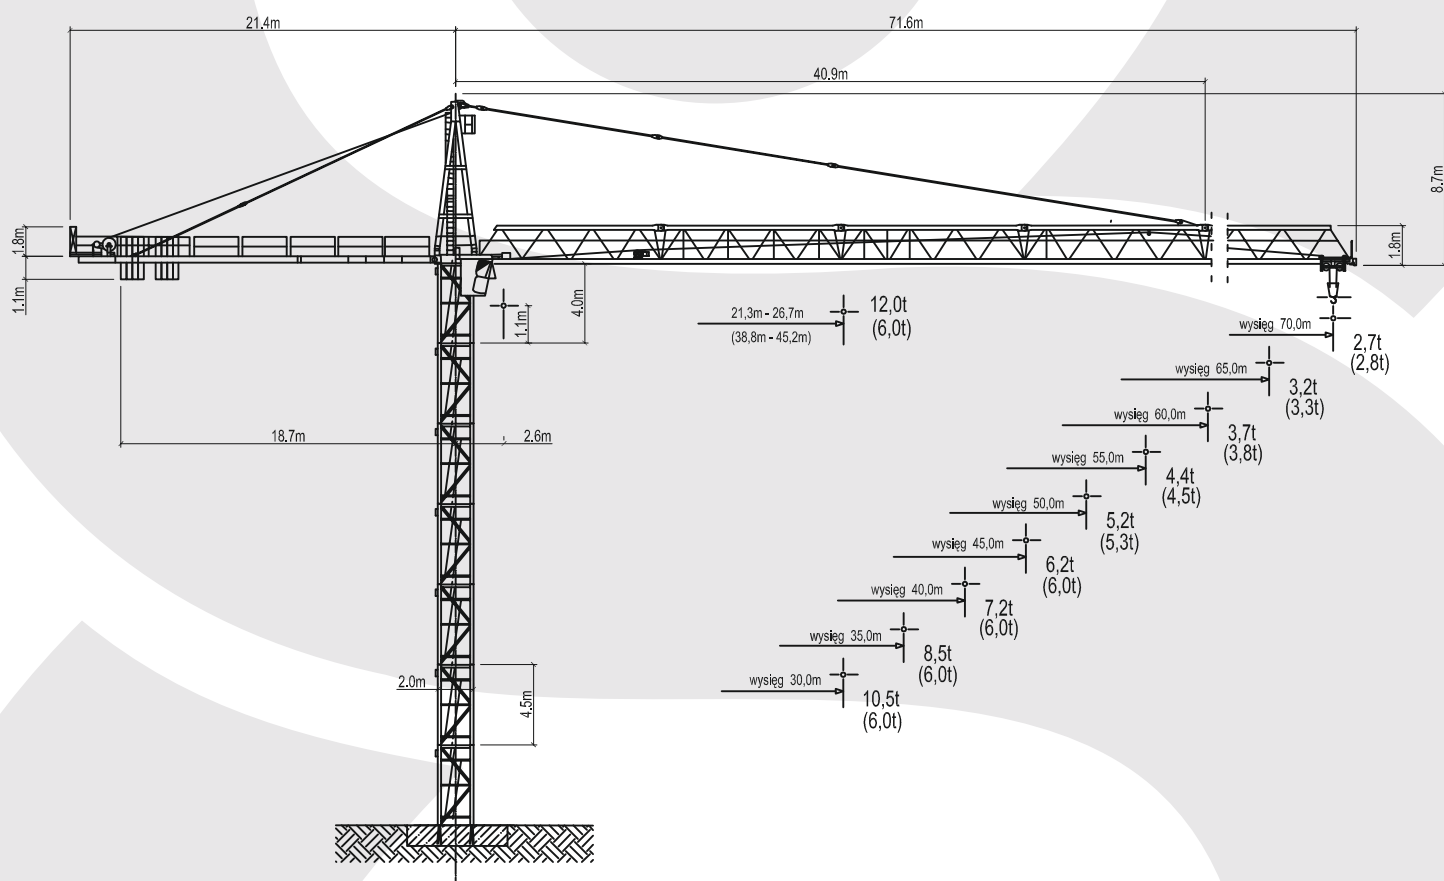

DANE TECHNICZNE:

UDŹWIG MAKSYMALNY: 12 TON
DŁUGOŚĆ WYSIĘGNIKA: 70 M

UDŹWIG NA MAKSYMALNYM WYSIĘGU: 2,7 TONY

WOLFF WK 7031 SL

UDŹWIG MAKSYMALNY 12 TON



Tablica udźwignów

		Wysięg (m)	12,0	25	30	35	40	45	50	55	60	65	70	Udźwig (t)
Dł. wysięgnika (m)	70	2,6 - 21,3		10,0	8,0	6,7	5,7	4,9	4,3	3,8	3,4	3,0	2,7	
	65	2,6 - 22,3		10,5	8,5	7,1	6,0	5,2	4,5	4,0	3,6	3,2		
	60	2,6 - 22,9		10,8	8,7	7,3	6,2	5,4	4,7	4,1	3,7			
	55	2,6 - 23,9		11,4	9,2	7,7	6,5	5,7	5,0	4,4				
	50	2,6 - 24,7		11,8	9,6	8,0	6,8	5,9	5,2					
	45	2,6 - 25,7		12,0	10,0	8,4	7,1	6,2						
	40	2,6 - 25,8		12,0	10,1	8,4	7,2							
	35	2,6 - 25,9		12,0	10,2	8,5								
	30	2,6 - 26,7		12,0	10,5									

		Wysięg (m)	6,0	25	30	35	40	45	50	55	60	65	70	Udźwig (t)
Dł. wysięgnika (m)	70	2,6 - 38,8		6,0	6,0	6,0	5,8	5,0	4,4	3,9	3,5	3,1	2,8	
	65	2,6 - 40,6		6,0	6,0	6,0	6,0	5,3	4,6	4,1	3,7	3,3		
	60	2,6 - 41,7		6,0	6,0	6,0	6,0	5,5	4,8	4,3	3,8			
	55	2,6 - 43,6		6,0	6,0	6,0	6,0	5,8	5,1	4,5				
	50	2,6 - 45,2		6,0	6,0	6,0	6,0	6,0	5,3					
	45	2,6 - 45,0		6,0	6,0	6,0	6,0	6,0						
	40	2,6 - 40,0		6,0	6,0	6,0	6,0							
	35	2,6 - 35,0		6,0	6,0	6,0								
	30	2,6 - 30,0		6,0	6,0									

WOLFF WK 7031 SL

UDŹWIG MAKSYMALNY 12 TON



Konfiguracja wieży

Dla żurawia wolnostojącego na kotwie fundamentowej.

Część obrotowa

Wysokość do haka **A = 1,1 m**

Wysokość do wysięgnika **B = 4,0 m**

Łączna wysokość **C = 12,7 m**



1	4,5		UV 20.4	UV 20.4	UV 20.4	TV 20.4
2	9,0		UV 20.4	UV 20.4	UV 20.4	TV 20.4
3	13,5		UV 20.4	UV 20.4	UV 20.4	TV 20.4
4	18,0		UV 20.4	UV 20.4	UV 20.4	TV 20.4
5	22,5		UV 20.4	UV 20.4	UV 20.4	TV 20.4
6	27,0		UV 20.4	UV 20.4	UV 20.4	TV 20.4
7	31,5		UV 20.4	UV 20.4	TVA 20.4	TV 20.4
8	36,0		UV 20.4	UV 20.4	TV 20.4	TV 20.4
9	40,5		UV 20.4	TVA 20.4	TV 20.4	TV 20.4
10	45,0			TV 20.4	TV 20.4	TV 20.4
11	49,5			TV 20.4	TV 20.4	TV 20.4
12	54,0			TV 20.4	TV 20.4	TV 20.4
13	58,5				TVÜ 20.4	
14	63,0				TV 25	
15	67,5				UVA 25	
16	72,0				UV 25	
17	76,5					
18	81,0					
Elem. wieży	Wys. pod hakiem (m)					

WOLFF WK 7031 SL

UDŹWIG MAKSYMALNY 12 TON



Konfiguracja wieży

Dla żurawia wolnostojącego na ramie krzyżowej.

Część obrotowa

Wysokość do haka **A = 1,1 m**

Wysokość do wysięgnika **B = 4,0 m**

Łączna wysokość **C = 12,7 m**



1	4,5		UV 20.4	UV 20.4	UV 20.4
2	9,0		UV 20.4	UV 20.4	UV 20.4
3	13,5		UV 20.4	UV 20.4	UV 20.4
4	18,0		UV 20.4	UV 20.4	UV 20.4
5	22,5		UV 20.4	UV 20.4	UV 20.4
6	27,0		UV 20.4	UV 20.4	UV 20.4
7	31,5		UV 20.4	UV 20.4	TVA 20.4
8	36,0		UV 20.4	UV 20.4	TV 20.4
9	40,5		TVA 20.4	TVA 20.4	TV 20.4
10	45,0		TV 20.4	TV 20.4	TV 20.4
11	49,5		TV 20.4	4,0 m	TV 20.4
12	54,0			KRE 280.1	TV 20.4
13	58,5			260.2	TVÜ 20.4
14	63,0				TV 25
15	67,5				UVA 25
16	72,0				4,0 m
17	76,5				KRE 480
18	81,0				
Elem. wieży	Wys. pod hakiem (m)				